



# PF8000 AUTOMATIC RISING KERB

## FRONT VIEW

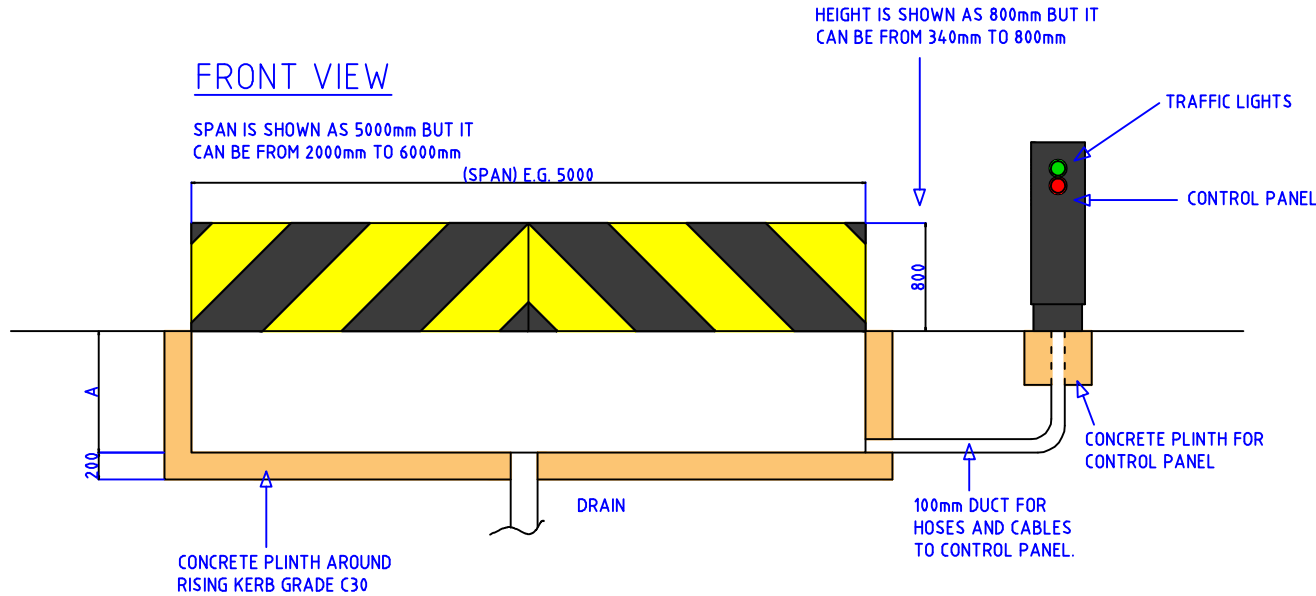

## PLAN VIEW

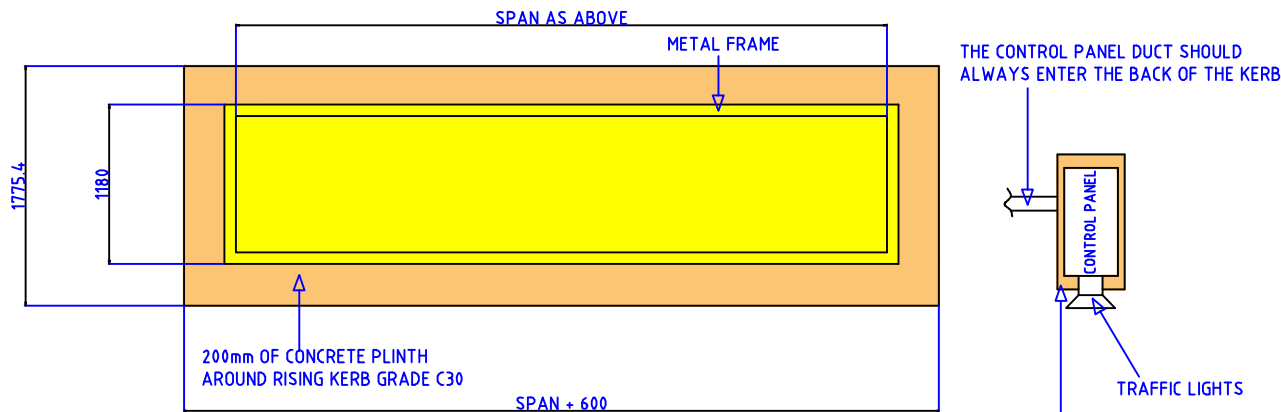

NOTE: POWER SUPPLY MUST BE 10A MCB NOT RCCD.

| HEIGHT OF RISING KERB | HEIGHT OF DIMENSION A |        |
|-----------------------|-----------------------|--------|
| 340mm HIGH            | A                     | 600mm  |
| 500mm HIGH            | A                     | 700mm  |
| 600mm HIGH            | A                     | 800mm  |
| 800mm HIGH            | A                     | 1000mm |

### INSTALLATION NOTE

THE PIT FOR THE RISING KERB TO BE DUG OUT FULLY PRIOR TO KERB BEING INSTALLED AND A DRY MIX BED IS RECOMMENDED TO LOWER THE KERB ONTO. ONCE IN POSITION THE KERB IS TO BE LEVELED AND THEN CONCRETE TO BE POURED AROUND THE KERB TO SECURE.

### FOUNDATION FOR CONTROL PANEL

CONCRETE TO BE CAST A MINIMUM OF 7 DAYS BEFORE INSTALLATION OF PANEL. PANEL TO BE FIXED DOWN TO CONCRETE WITH SELF EXPANDING BOLTS (PARABOLTS). HOLES TO BE DRILLED ON INSTALLATION.

IT IS THE CLIENTS RESPONSIBILITY TO ADVISE PARKING FACILITIES OF ANY UNDERGROUND SERVICES, CABLES, PIPES AND DUCTS IN THE VICINITY OF ANY FOUNDATION, PRIOR TO ANY WORK BEING CARRIED OUT BY PF. PARKING FACILITIES RESERVE THE RIGHT TO SUSPEND ALL CIVIL WORK UNTIL ALL ISSUES THAT INTERFERE WITH THE INSTALLATION HAVE BEEN RECTIFIED.